















More information on the website  
[radwag.com/en/info,w1,WKD](http://radwag.com/en/info,w1,WKD)

# PS 600.R1 Precision Balance



## Functions

-  Autotest
-  Dosing
-  Percent Weighing
-  Totalizing
-  Parts counting
-  Peak hold
-  Newton unit measurement
-  Statistics
-  Checkweighing
-  GLP Procedures
-  Animal weighing
-  Density determination

## Datasheet

Metrological parameters	
Maximum capacity [Max]	600 g
Minimum load	20 mg
Readability [d]	0,001 g
Tare range	-600 g
Repeatability (Max)	0,0015 g
Repeatability (5% Max)	0,0005 g
Linearity	±0,002 g

Metrological parameters	
Stabilization time	2 s
Adjustment	external
Physical parameters	
Levelling system	manual
Display	LCD (backlit)
Delivery components	Balance, weighing pan, weighing pan shield, grounding foot ×1, foot ×3, power supply.
Weighing pan dimensions	128×128 mm
Packaging dimensions	470×380×336 mm
Net weight	3,2 kg
Gross weight	4,8 kg
Protection class	IP 43
Communication interface	
Communication interface	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)
Electrical parameters	
Power supply	Adapter: 100-240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max
Environmental conditions	
Operating temperature	+10 ÷ +40 °C

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



## Accessories

Balance Storage Case	Displays
Barcode scanners	Draft Shield
Cigarette lighter receptacle power supply cables	AP2-1 Current Loop Unit
USB cable (scale - printer)	RPANEL BOX
Receipt Printer	Protective cover for balances
Density determination KIT	RS 232, RS 485 cables
Anti-Draft Chamber for Balances with a 128×128 mm Weighing Pan	Under-Pan Weighing Rack
Antivibration Tables	RS 232 cables (scale - printer)


## Software

RAD-KEY	LabVIEW Driver
R Panel	Alibi Reader
R-LAB	RADWAG Development Studio
E2R System	R.Barcode



## Device dimensions



PS R, d = 1mg

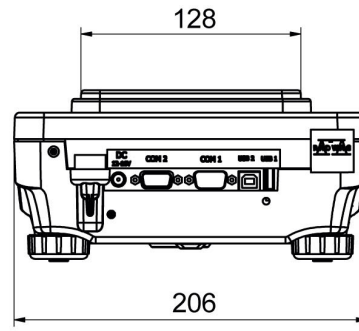

PS R, d = 10 mg

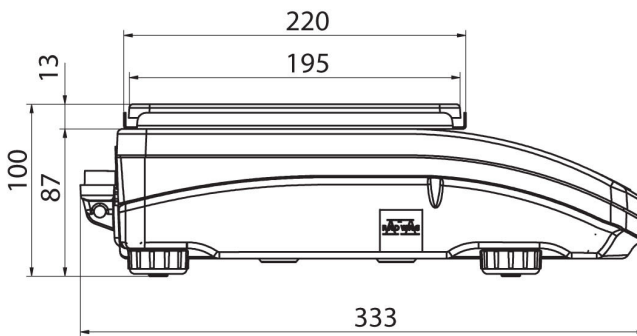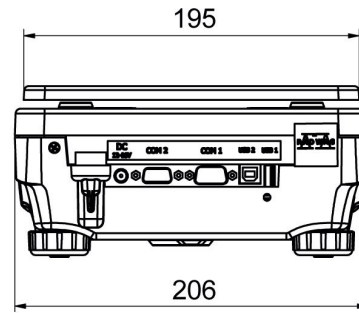

PS R.M, d = 10 mg

