



2.line chart

Coating Thickness Gauge












Three data representations

Applicable system

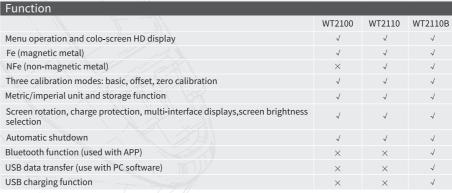





USB cable	







Calibration sheet

Specification				
	WT2100	WT2110	WT2110B	
Measurement range	0~1800um/0~70.9mil/0~1.8mm	0~1500um/0~59mil/0~1.5mm	0~1500μm/0~59mil/0~1.5mm	
Resolution	(0.1µm(<100µm) 1µm(≥100µm))/0.1mil/0.001mm	(0.1µm(<100µm) 1µm(≥100µm))/0.1mil/0.001mm	(0.1μm(<100μm) 1μm(≥100μm))/0.1mil/0.001mm	
Measurement error	≤150µm:±5µm	≤150µm:±5µm	≤150µm:±5µm	
	>150µm:±(3%H+1µm)	>150µm:±(3%H+1µm)	>150µm:±(3%H+1µm)	
Minimum diameter of magnetic metal substrate	12mm	12mm	12mm	
Minimum thickness of magnetic metal substrate	0.5mm	0.5mm	0.5mm	
Minimum radius of curvature for magnetic convex substrate	2mm	2mm	2mm	
Minimum radius of curvature for magnetic concave substrate	11mm	11mm	11mm	
Minimum diameter of non- magnetic metal substrate	×	50mm	50mm	
Minimum thickness of non- magnetic metal substrate	×	0.5mm	0.5mm	
Battery	3x1.2V NiMH battery (weight 36.5g) or 5V1A power adapter			
Size	70.30*38.6*149.59mm			
Weight	136.9(including battery)			

019 020 Email: sales@wintact. net Website: www.wintact.net